

BASIN INSTALLATION MANUAL

CHECK AFTER INSTALLATION

| Check list | YES/NO |
|--|--------|
| 1.Open shut-off valve,press flush button 5-6 times to assure if it operate properly? | |
| 2.Whether the basin and the wall at the junction of silicone injection? | |
| 3.Does shut-off valve operate properly? | |
| 4.Are there any leakages ? | |
| | |
| | |

INTENANCE

● USE


- 1.Try to protect basin surface and radius in particular from solid stuff hitting of scratching to avoid glaze damage.

● CLEANING

- 1.Wiped clean with neutral cleaner or soft damp cloth.
- 2.To keep your basin looking new , make sure you rinse it out thoroughly after each use.
Do not use abrasives on this product ,as they will scratch and ruin the surface .
Stubborn stains , paint , or tar can be removed with turpentine or paint thinner.

● MAINTENANCE

1. For deep cleaning, please fill the basin up with water (water: bleach is 1:1) and soak for at least 15-20 minutes then clean the bottom and all around. Or use "84 disinfectant" (following the instruction) to clean the basin.
Remember to remove the water in time with dry cloth and keep the board dry.

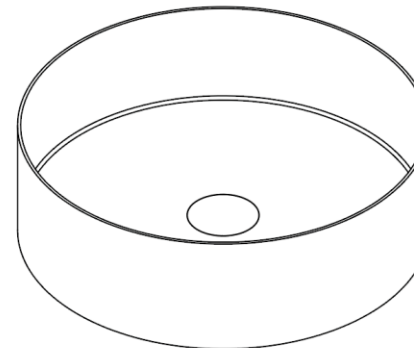


BEFORE YOU BEGIN


NOTES

Please read these instructions carefully to familiarize yourself with the required tools, materials, and installation sequences. Follow the sections that pertain to your particular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions. All information in these instructions is based upon the latest product information available at the time of publication. Innoci reserves the right to make changes in product characteristics, packaging, or availability at any time without notice. These instructions contain important care, cleaning, and warranty information, please leave instructions for the consumer.

MOUNTING TOOL

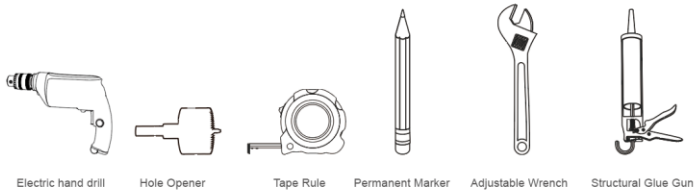

PRODUCT SIZE

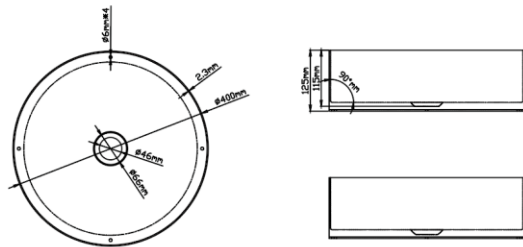

BASIN INSTALLATION

